TACENS Gelus PRO III

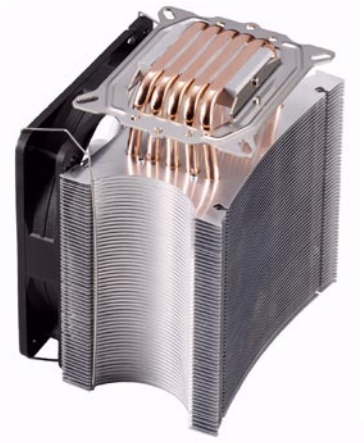

- **NEW INTELLIGENT PWM 12cm 9dB ULTRA-SILENT TACENS AURA PRO FAN WITH EXCLUSIVE FLUXUS PRO BEARING AND ANTIVIBRATION SYSTEM**

- **POWERFUL FIVE U-SHAPE SUPERCONDUCTOR HEATPIPES WITH DIRECT HEATPIPE CPU CONTACT FOR FASTEST HEAT TRANSFER**

- **54 HUGE ALUMINIUM FINS BUT LOW WEIGHT**

- **FAST AND EASY INSTALLATION FOR LGA 775/1366, AMD K8 & AM2/AM3**

HEATSINK SPECIFICATIONS	
DIMENSIONS (mm)	78 x 125 x 150 mm
WEIGHT	605 g
MATERIAL	6Φ x 5 heatpipes direct contact with CPU Aluminum fins (54±1 fins)
SOCKET TYPE	INTEL LGA 775/1366, AMD 754,930 & 940 AND AMD AM2/AM3
FAN SPECIFICATIONS	
DIMENSIONS (mm)	120 x 120 x 25 mm
WEIGHT	134.4g
FAN SPEED	750 – 1800 R.P.M. +-10% PWM
FAN AIRFLOW	29.3 – 85.95 CFM
LIFE EXPECTANCY	MORE THAN 60000 hrs
BEARING	TACENS FLUXUS PRO BEARING
VOLTAGE RATING	10.2V-13.8V
NOISE LEVEL	9 – 19 dB

TACENS FLUXUS PRO BEARING

ULTRA SILENT

LOWER NOISE THAN SLEEVE OR BALL BEARINGS

DUST PROOF DESIGN

CLOSED CONSTRUCTION PREVENT THE DUST AND FOREIGN BODY INTO DE BEARING

LONG LIFE

MORE THAN 60000 hrs

LOW WORKING TEMPERATURE

THE FAN WORKS PERFECTLY IN VERY HOT CONDITIONS

RoHS 2002/95/EG

WWW.TACENS.COM **DESIGNED IN EUROPE**